

RD-65

Remote Display
CE



- **Construction**– Powder coated mild steel enclosure (IP65) with sun visor and fixed mounting brackets
- **Display**– Double row ultra bright large 127 mm / 5", six digit LED display visible up to 46 m / 150'
- **Power**– 100VAC, 50/60Hz

VALUE IN
WEIGHING

RD-65 Remote Display

Specifications

Displays up to 999,999 or down to -99,999

Annunciator: kg, lb, G (gross), N (net)

Serial Port: RS-232, RS-485 with selection up to 14 protocols, three data formats and eight types of baud rates

Communication Interface:

Serial Cable Length 10 m / 32'

Serial Port: RS-232, RS-485

Data Format: 8N1, 7E1 or 7O1

Baud Rate: 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200

Power Adapter:

Input: 100 - 240VAC, 50/60HZ

Output: 24 VDC, 2.5 amp

Power Requirement:

11-32 VDC

Operating Temperature:

-15° C to 50° C / -5° F to 122° F

Product Dimension:

777 mm (L) x 122 mm (W) x 285 mm (H)

30.5" W x 4.8" L x 11" H

Shipping Weight: 12 kg / 27 lb

Package Dimension:

910 mm (L) x 470 mm (W) x 165 mm (H)

35.8" L x 18.5" W x 6.5" H

Compatible with Most:

Brecknell, Dillon, Avery Weigh-Tronix, GSE, Cardinal, Rice Lake & Transcell indicators


Certification: CE

Product Code:

816965004638



Note: Only applicable for kg or lb unit of measure

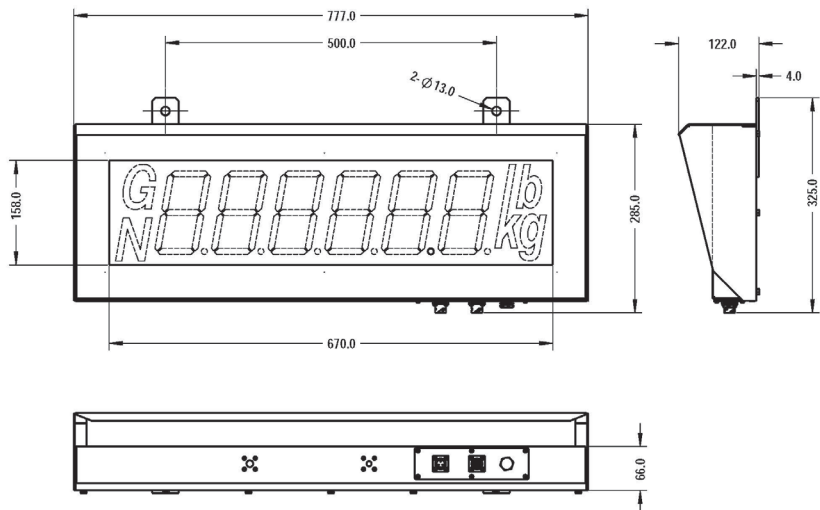

a division of Avery Weigh-Tronix, LLC

Brecknell

1000 Armstrong Dr., Fairmont, MN 56031
Toll free: 800-637-0529, Tel: 507-238-8702
Fax: 507-238-8271
e-mail: sales@brecknellcales.com
www.brecknellcales.com



Brecknell

Foundry Lane, Smethwick
West Midlands B66 2LP UK
Tel: +44 (0) 845 246 6717
Fax: +44 (0) 845 246 6718
Email: sales@brecknellcales.co.uk
www.brecknellcales.co.uk

