**APPROVALS**

Available upon request

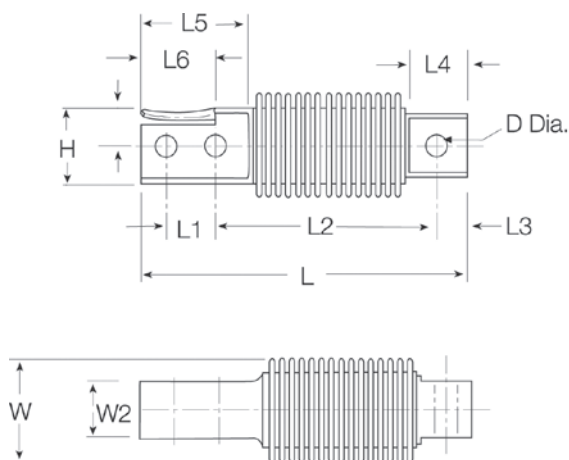
Dimensions

Picture is a representation of actual product

Rated Capacity	H	L	L1	L2	L3	L4	L5	L6	W	W2	D
kg/mm											
5-200	31.00	123.0	18.00	82.00	9.9	21.00	45.00	27.9	42.00	20.1	8.20
lb/in											
11-441.0	1.22	4.84	0.71	3.23	0.39	0.82	1.77	1.10	1.65	0.79	0.32

Order Information

Load Rating	Part#	Est. Weight	Price
OIML C3			
10 kg		22.0 lb	
20 kg		44.1 lb	
50 kg		110.2 lb	
100 kg		220.5 lb	
200 kg		441.0 lb	
OIML D1			
5 kg		11 lb	

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS

RLHBB** page 156

RICE LAKE WEIGHING SYSTEMS

RL9018SS page 138

VPG REVERE®

SHB page 289

VPG TEDEA-HUNTLEIGH®

355 page 347

METTLER TOLEDO®

MTB*** —

** Except for 500 kg

*** Color code is different

Specifications**Full Scale Output:**

2.0 mV/V

Output Resistance:

356 (± 0.12) ohms

Input Resistance:

350-400 ohms

Material/Finish:

Stainless steel

Temperature:Operating range
0°F to 150°F (-18°C to 65°C)**Seal Type:**

Welded-seal, IP68

Safe Overload:

150% full scale

Rated Excitation:

5- 10 V DC (15 V maximum)

Combined Error:

0.05% full scale

Insulation Resistance:

5,000 megohms

Cable Length:

10 ft (3.1 m)

Cable Diameter:

0.190 PVC jacket

Cable Color Code:Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Grey -Sense**Warranty:**

One-year limited warranty

Approvals:FM
OIML
Ex (available upon request)