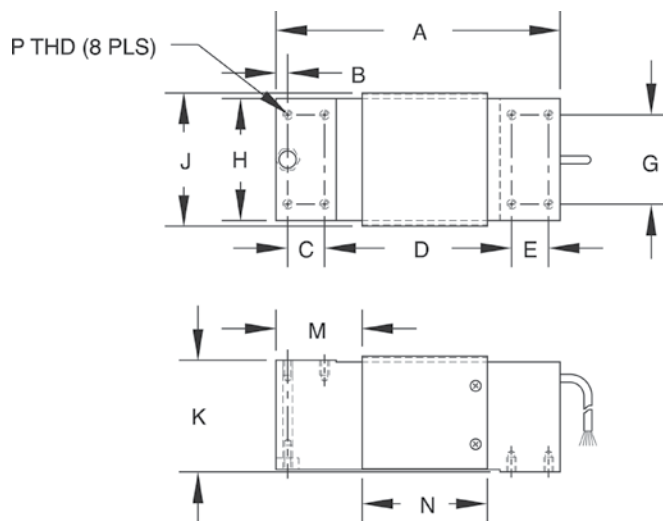


**APPROVALS****Dimensions***Picture is a representation of actual product*

Rated Capacity	A	B	C	D	E	G	H	J	K	M	N	P
kg/mm												
50-1,000	191.00	8.0	25.00	125.00	25.00	60.00	75.00	82.00	75.00	57.5	85.00	5/16-18 UNC x 15 DP
lb/in												
110.2-2,205	7.52	0.31	0.98	4.92	0.98	2.36	2.95	3.23	2.95	2.26	3.35	5/16-18 UNC x 0.59 DP

Order Information

Load Rating		Part #	Est. Weight	Price
50 kg	110.2 lb	191096	5 lb	Consult
75 kg	165.4 lb	191097	5 lb	Consult
100 kg	220.5 lb	191098	5 lb	Consult
150 kg	330.7 lb	191099	5 lb	Consult
200 kg	440.9 lb	191100	5 lb	Consult
250 kg	551.2 lb	191101	5 lb	Consult
300 kg	661.4 lb	191102	5 lb	Consult
500 kg	1,102.3 lb	191103	5 lb	Consult
635 kg	1,400 lb	191104	5 lb	Consult
1,000 kg	2,205 lb	191105	5 lb	Consult

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS

RL1250 page 193

RICE LAKE WEIGHING SYSTEMS

RLPWM12 page 183

VPG TEDEA-HUNTLEIGH®

1250 page 362

HBM®

PW12* page 265

*Color code is different

Specifications**Full Scale Output:**

2.0 mV/V nominal

Output Resistance:

350 (± 3) ohm

Input Resistance:

415 (± 15) ohm

Material/Finish:

Anodized aluminum

Temperature:

Compensated range

14°F to 104°F (-10°C to 40°C)

Operating range

0°F to 150°F (-18°C to 65°C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Rated Excitation:

5-10 VDC (15 VDC Max)

Insulation Resistance:

>5,000 megohms

Cable Length:

10 ft (3.1 m)

Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Blue +Sense

Yellow -Sense

Warranty:

Two-year limited warranty

Approvals:

cFMus

NTEP